



DANTE™ AV NETWORKING WORLD

AMSTERDAM - **9 FEBRUARY 2015**

Networking 101

Landon Gentry
Audinate



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP NETWORKING



- Do you use one of these?



IP NETWORKING



- Everything you think of when you imagine a home network

127.0.0.1





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

AUDIO IP NETWORKING



- Do you use one of these?



WHY?

- Digital?
 - Copper!





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

WHY?

- Networking?
 - Digital Transport
 - Multiple channels of audio via a single connection

DIGITAL TRANSPORT

- S/PDIF (2 channels, optical or electrical cable)
- ADAT (8 channels, optical cable)
- AES3 (2 channels, electrical (balanced))





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

WHY?


- Networking?
 - Allows for easy routing of multiple sources to multiple destinations logically, without lots of wires



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

WHY?

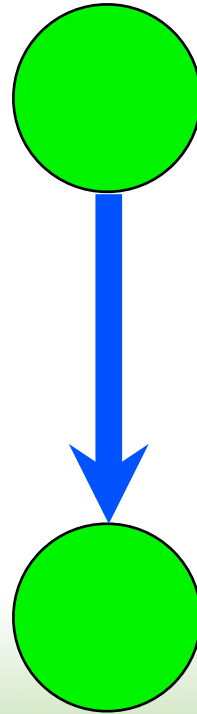




DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

WHY?

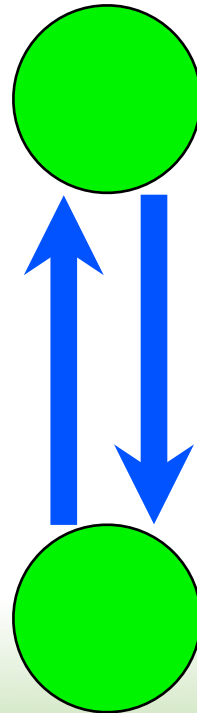





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

WHY?

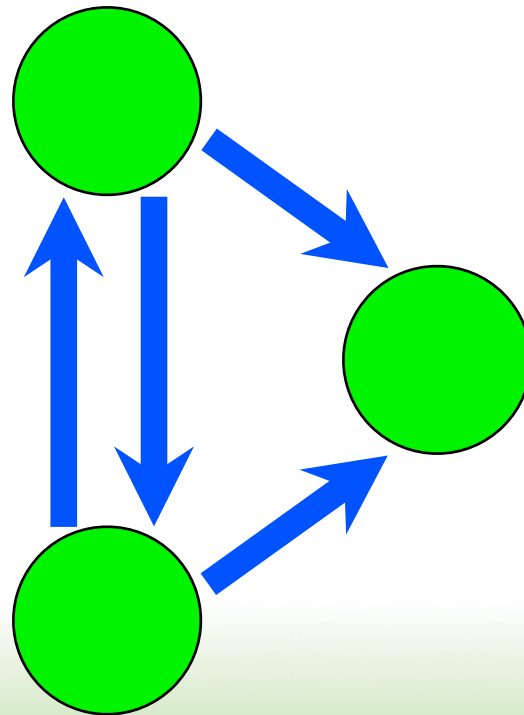

WHY?

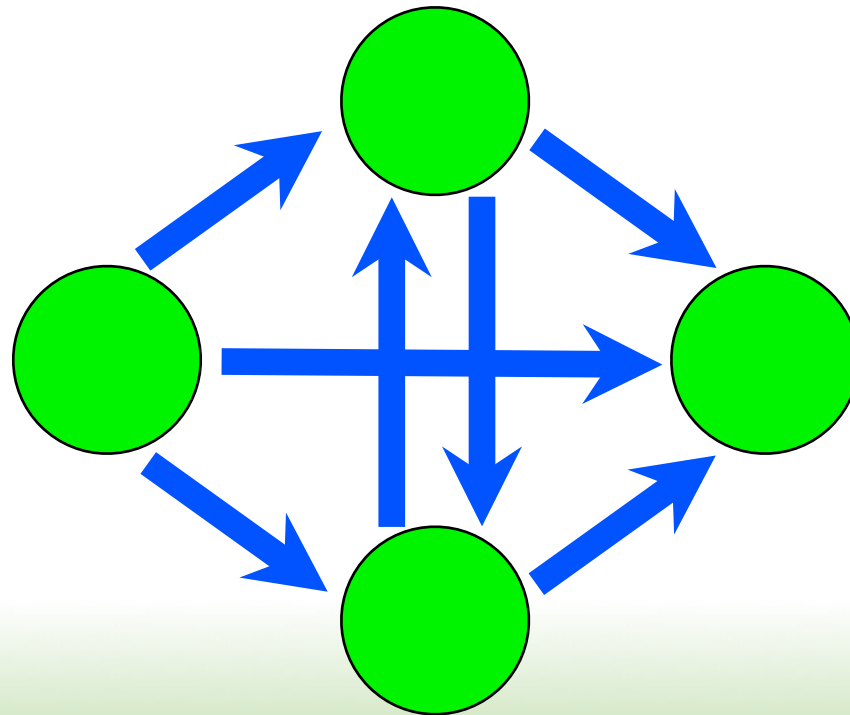



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

WHY?

- Networking?



IP NETWORKS

- Packet switched


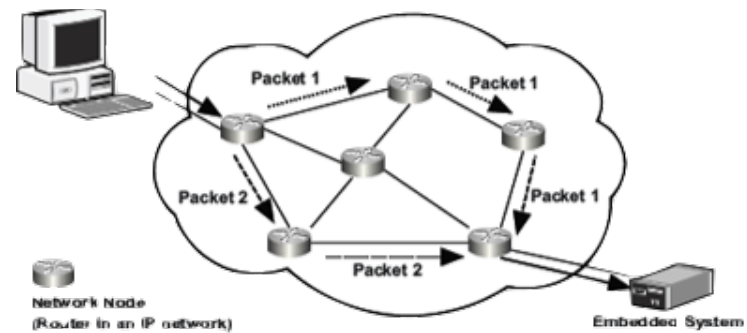


Figure 2.2 Packet switched Network

- Messages (packets) are transmitted through cables
 - Switches receive and re-transmit messages


IP NETWORKS

- Messages are wrapped in several headers
 - Called encapsulation
 - Like putting a letter inside an addressed envelope

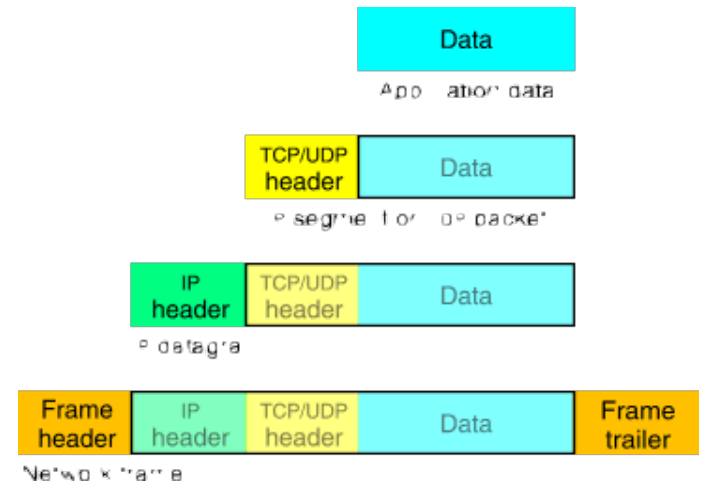

IP NETWORKS

- Encapsulation often described as network layers
- Allows a link to support many applications and services

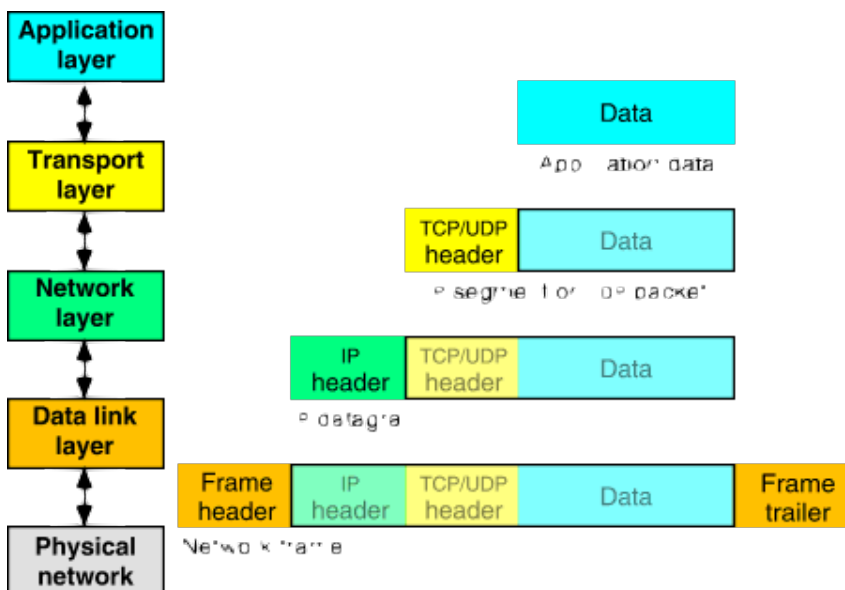



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

VOCABULARY

- Understanding the terminology

jar·gon¹

/ˈjærgən/

noun

special words or expressions that are used by a particular profession or group and are difficult for others to understand.

"legal jargon"

synonyms: specialized language, slang, cant, idiom, argot, patter; [More](#)



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

THE OSI MODEL

INTERNATIONAL
STANDARD

ISO/IEC
7498-1

Second edition
1994-11-15

Corrected and reprinted
1996-06-15

- ISO/IEC 7498-1



International
Organization for
Standardization

**Information technology — Open Systems
Interconnection — Basic Reference Model:
The Basic Model**

*Technologies de l'information — Modèle de référence de base pour
l'interconnexion de systèmes ouverts (OSI): Le modèle de base*

THE OSI MODEL






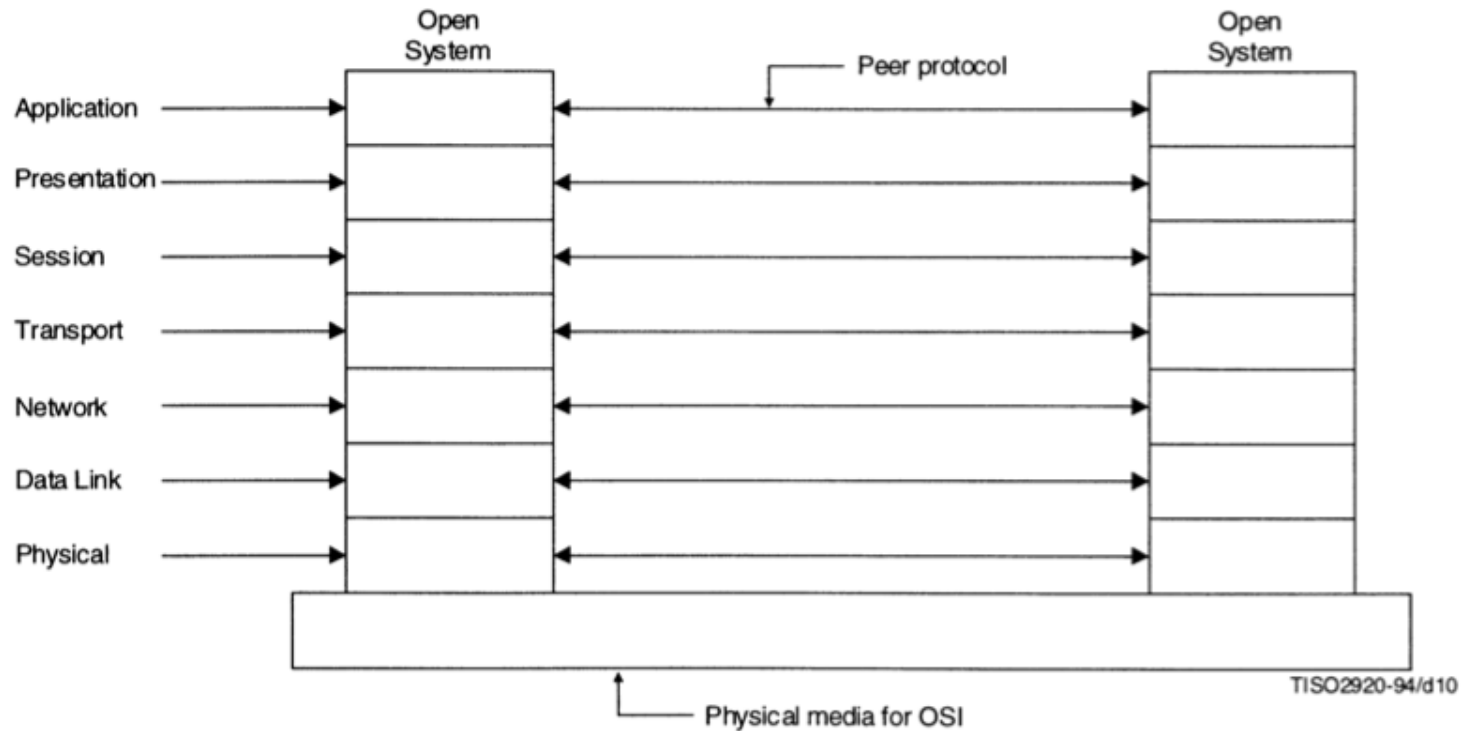





Figure 11 – Seven layer reference model and peer protocols

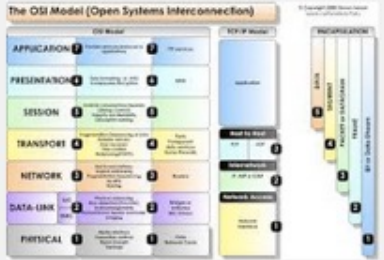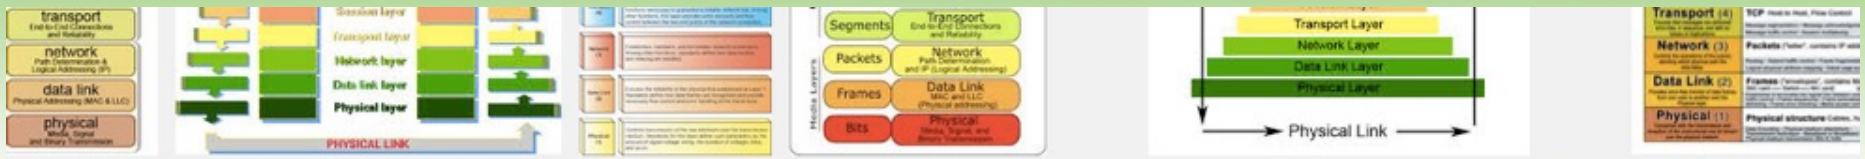

Application	HTTP, FTP, SMTP
Presentation	JPEG, GIF, MPEG
Session	AppleTalk, WinSock
Transport	TCP, UDP, SPX
Network	IP, ICMP, IPX
Data Link	Ethernet, ATM switch, bridge
Physical	Ethernet, Token Ring hub, repeater



OSI Layer	Windows NT	Novell NetWare	Internet
Application	File, Disk, Network Pipes, or Networks		
Presentation	Environment Subsystem	NCP, NetBIOS, Samba, NFS, SLP, SPP, STRONG, TLI, SLP	NFS, NFS, NFS, NFS, NFS, NFS, NFS, NFS
Session	Network		
Transport	NetBIOS	SPP	TCP, UDP, SPX
Network	NetBIOS	IPX	IP, OSPF
Data Link	NetBIOS	NetBIOS	IP, OSPF
Physical	NetBIOS	NetBIOS	IP, OSPF

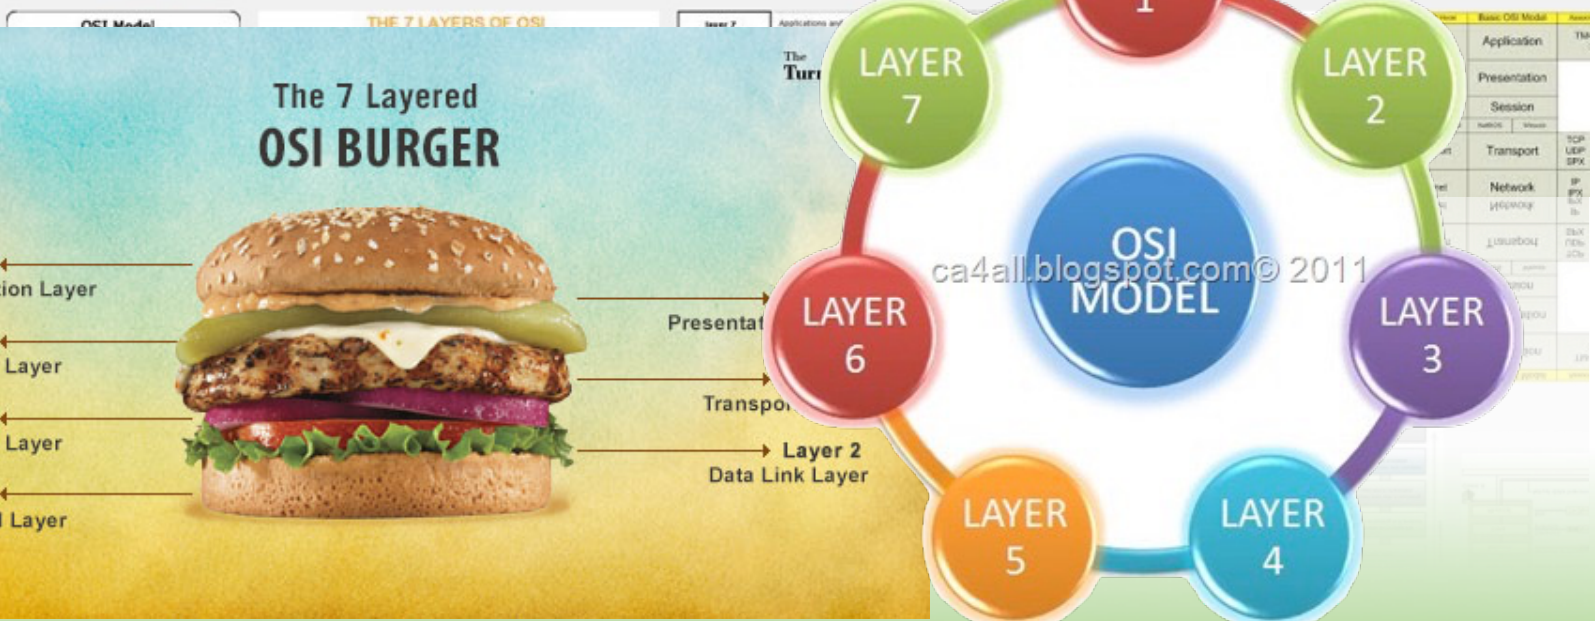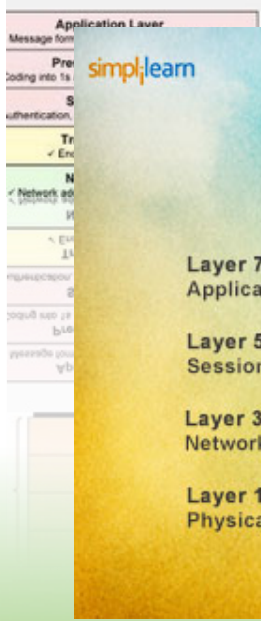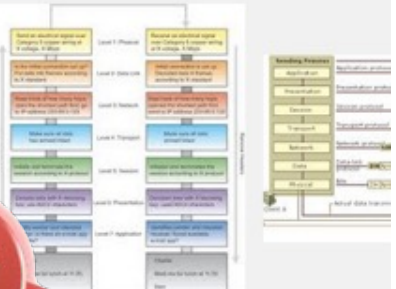



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

CCNA


Cisco Certified Network Administrator



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

CCNA FOR DUMMIES

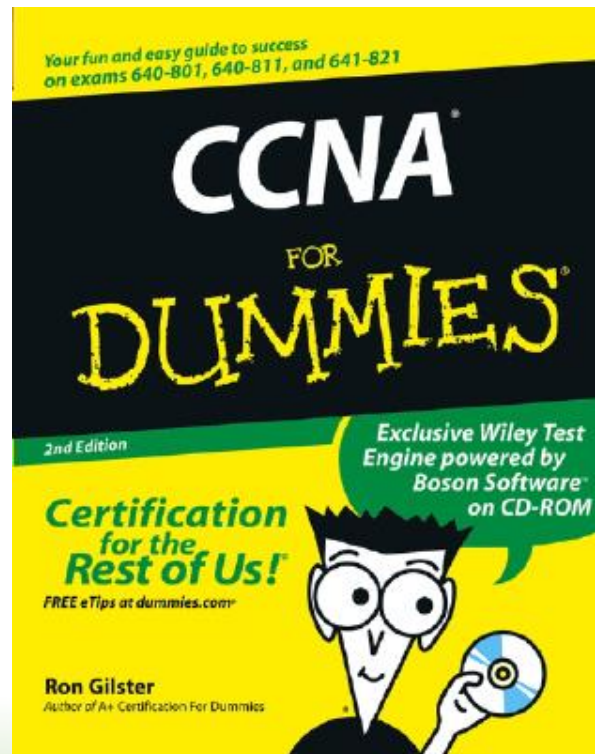



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

CCNA FOR DUMMIES

The CCNA exam asks you to provide at least three reasons that the "industry" uses layered interconnection models. Examples of layered networking models include the seven-layer OSI model (which you need to know inside and out) and the Department of Defense (DOD) five-layer model (which you don't). The basic reason for using a layered networking approach is that a layered model takes a task, such as data communications, and breaks it into a series of tasks, activities, or components, each of which is defined and developed independently.



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

CCNA FOR DUMMIES

OSI model

- data communications
 - components
 - defined independently

OSI MODEL AS A




- Hundreds of examples
- Shown this way because it is always shown this way?
- Useful from a developers view, but...



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

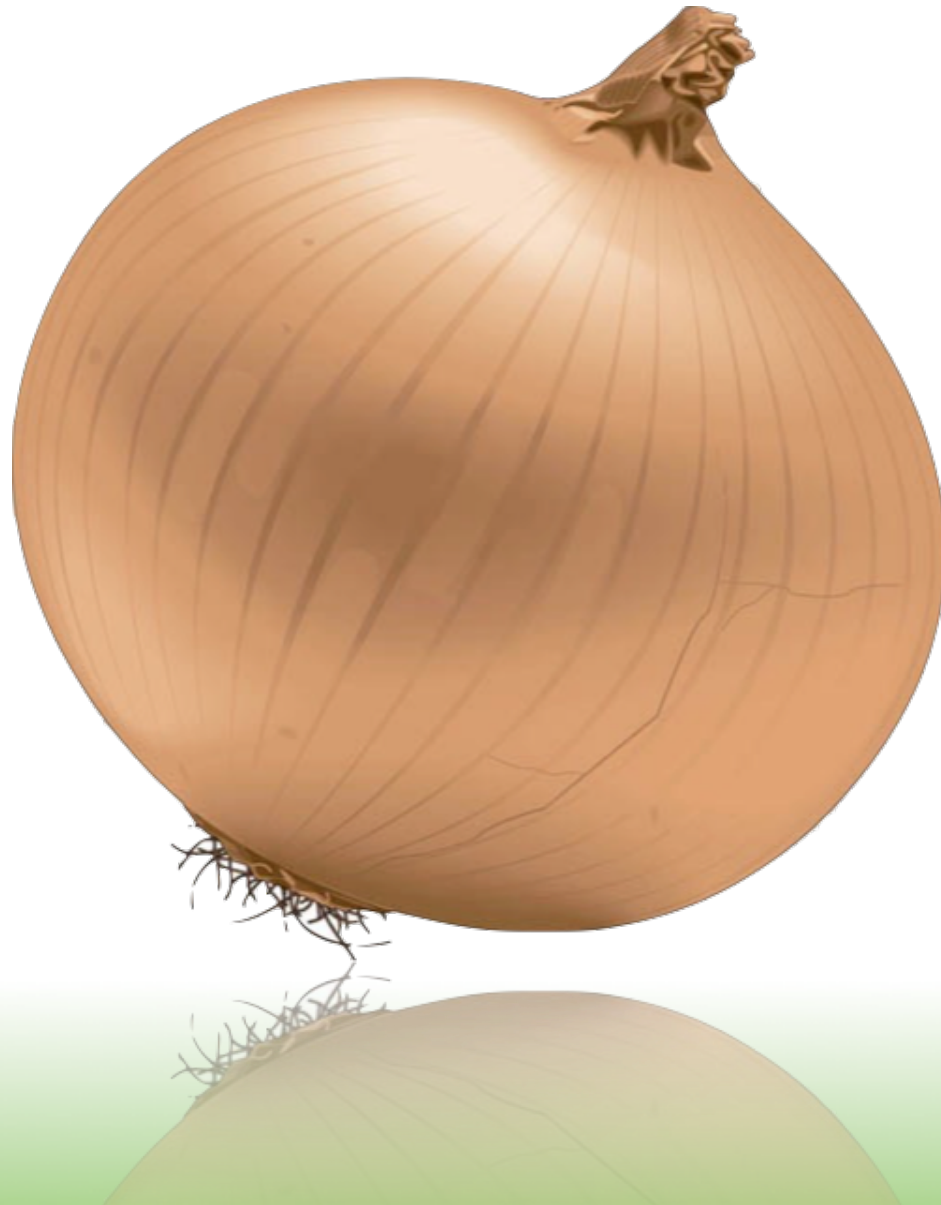

LAYER 1 - PHYSICAL

- You can say it is the cable:
 - CAT5/6
 - fiber optic
 - RF





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 1 - PHYSICAL

- It is really the “electrical” signaling
- It is different from the other layers
 - Every other layer is logical and deals with chunks of data
 - This one is all “bits”, 1s and 0s

LAYER 1 - PHYSICAL

- Layer 1 Audio?
 - AES50





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 1 - PHYSICAL


- This is the “skin” of my OSI Model onion
 - Like an onion, I’m going to discard it (from my talk)

SLICE THE ONION

A sliced onion is shown in the center of the slide, with its layers clearly visible. The onion is cut into a circular slice, revealing concentric rings of pinkish-red and white layers. The onion is positioned behind the main text and bullet points, serving as a visual metaphor for the layers of a network stack.


- The “lower” layers are really the “outer” layers
- Going “up” the stack is really going “in” to the center

SLICE THE ONION

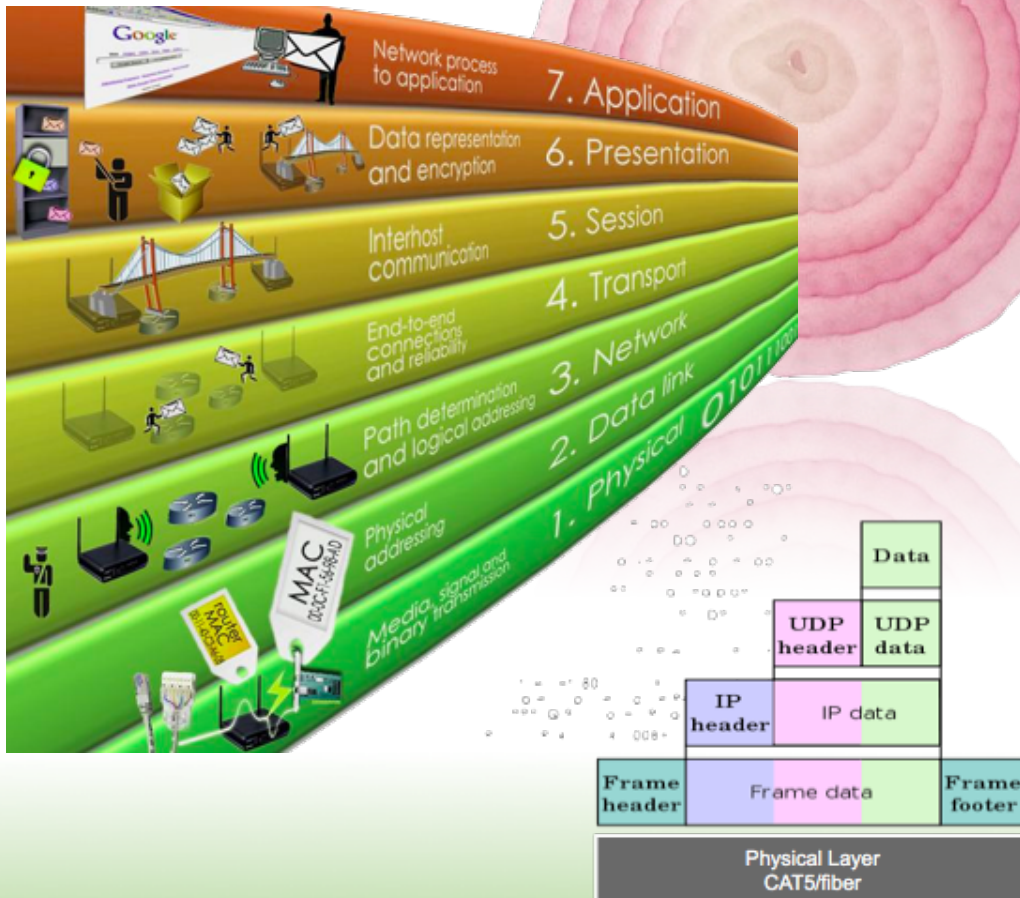

LAYER 2 - DATALINK

- The “lowest” logical layer
 - The “outer most” wrapper of a chunk of data
 - (remember the onion)

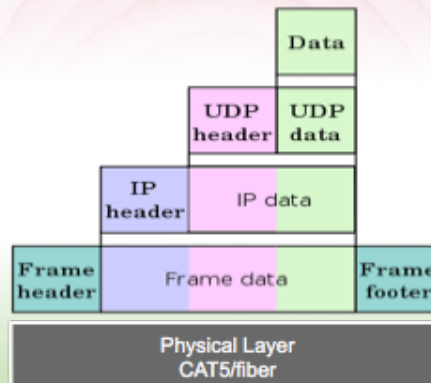



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 2 - DATALINK

- Responsible for reliable transmission of data over the communication medium
 - Detect bit transmission errors
- Local Area Network (LAN)



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 2 - DATALINK

- Ethernet (IEEE802.3)
 - Other - IEEE802.11, ITU-T G.hn




DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 2 - DATALINK


- Ethernet
 - “Frames”



LAYER 2 - DATALINK

- MAC Addresses
(Media Access Control)

- e.g. 00-0F-1F-FE-3A-F8
- Unicast, globally unique)

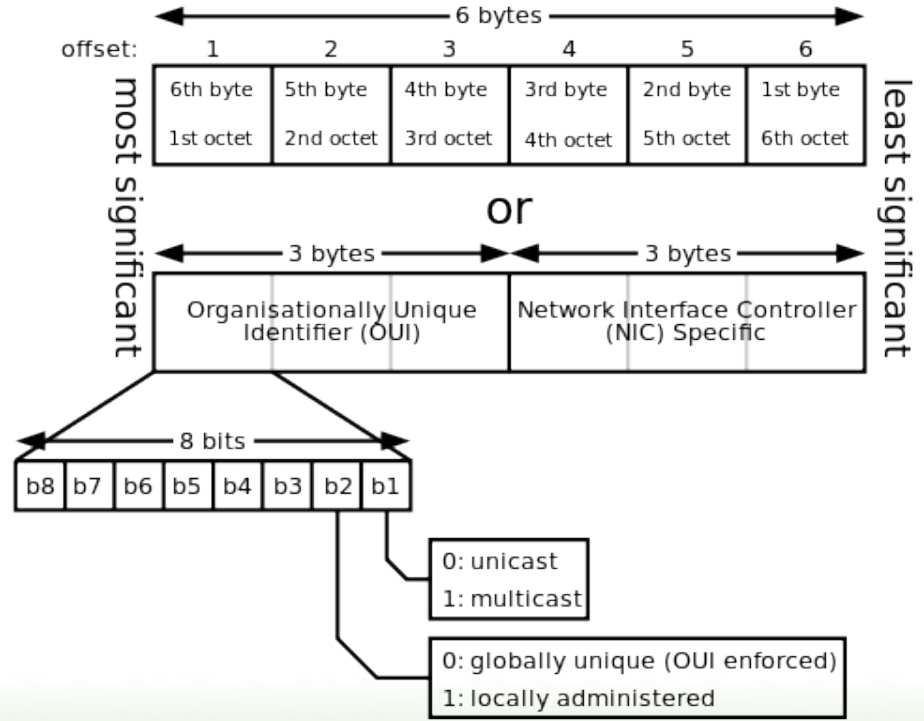


LAYER 2 - DATALINK

- Layer 2 Audio?
 - CobraNet
 - EtherSound
 - AVB



LAYER 3 - NETWORK

- This is where people start to feel familiar

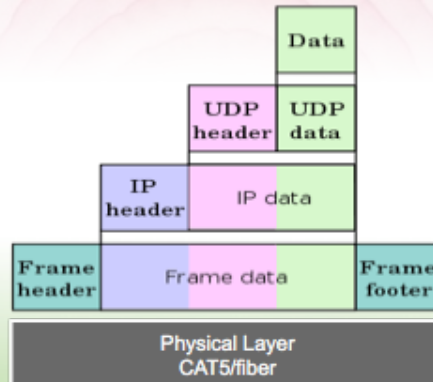



DANTE™ AV NETWORKING WORLD


www.audinate.com/avnw-amsterdam15 ©2015

LAYER 3 - NETWORK

- Responsible for:
 - Addressing
 - Fragmentation and reassembly of data streams
 - Maintaining “Types of Service”
 - “Best effort” delivery

LAYER 3 - NETWORK

- IP Addresses

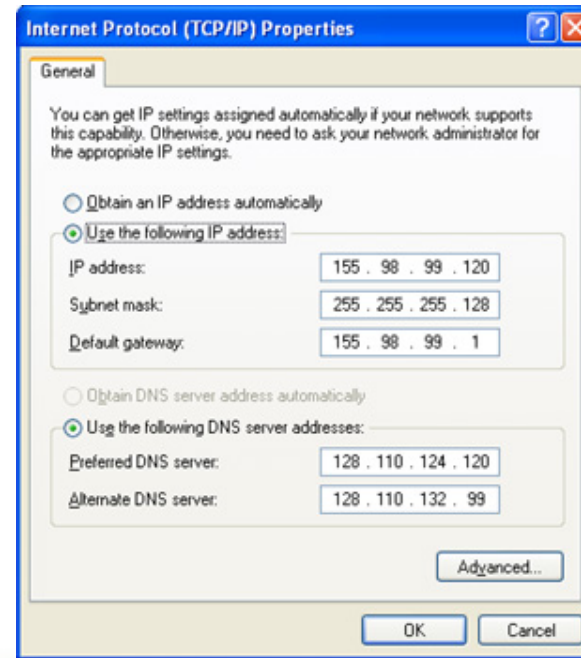



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- Addresses managed by Internet Assigned Numbers Authority (IANA)
- Legacy approach was to divide IPv4 into classes with a fixed network address



IP ADDRESSING

Class	First Octet Range	Default Subnet Mask	Max Hosts	Format
A	1-126	255.0.0.0	16M	
B	128-191	255.255.0.0	64K	
C	192-223	255.255.255.0	254	
D	224-239	N/A	N/A	
E	240-255	N/A	N/A	



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- Reserved by the IETF / IANA:
 - Private address ranges:
 - 192.168.0.0, 10.0.0.0, 172.16.0.0
 - Zeroconf address range: 169.254.0.0
 - Multicast range: 224.0.0.0 - 239.255.255.255



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- Classless Inter-Domain Routing (CIDR) was introduced to greatly expand the number of addresses
 - Allow the netmask to be variable length
 - Addresses written in the format: a.b.c.d/24
 - Seamless upgrade from legacy approach



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- For example:
 - 192.168.1.0 with a netmask 255.255.255.0 becomes 192.168.1.0/24
 - The “old” Class A, B and C ranges are now:
 - /8, /16 and /24



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- Addresses can be set static (manual) or dynamic
 - Static schemes require someone to design, manage, configure, and maintain
 - Error prone, time consuming



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- DHCP (Dynamic Host Control Protocol)
 - Most devices will use DHCP if one is present on the network
- Often DHCP servers will also allow you to create a “reservation” for a particular address



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- What if there is no DHCP server?
- IPv4 Link Local is an automatic scheme for zeroconf networks
 - Supported by Macintosh and Windows



DANTE™ AV NETWORKING WORLD


www.audinate.com/avnw-amsterdam15 ©2015

IP ADDRESSING

- Hosts use an algorithm to find an IP address in the range of: 169.254.X.Y
 - Ask if the address is already in use
 - If the address is in use, the owner responds
 - If no response, free to start using

LAYER 3 - NETWORK

- IP Header

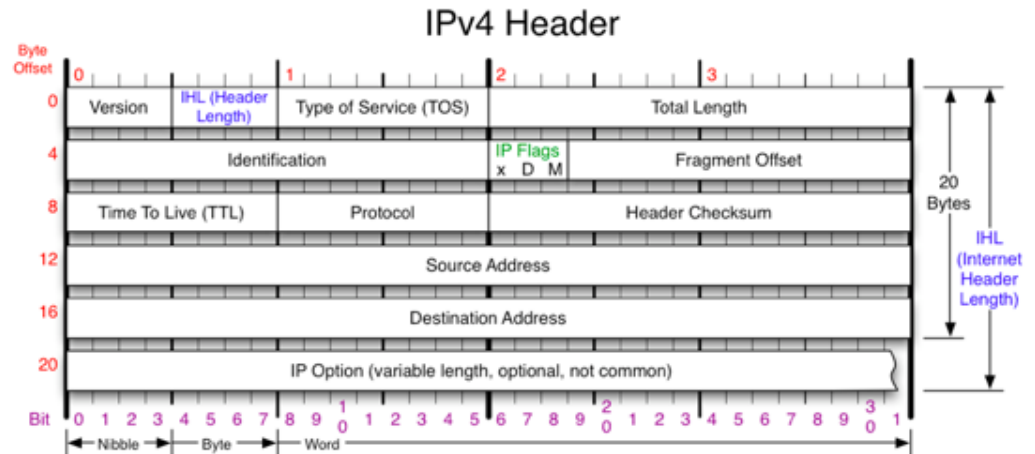

<p>Version</p> <p>Version of IP Protocol. 4 and 6 are valid. This diagram represents version 4 structure only.</p>	<p>Protocol</p> <p>IP Protocol ID. Including (but not limited to):</p> <table border="0"> <tr> <td>1 ICMP</td> <td>17 UDP</td> <td>57 SKIP</td> </tr> <tr> <td>2 IGMP</td> <td>47 GRE</td> <td>88 EIGRP</td> </tr> <tr> <td>6 TCP</td> <td>50 ESP</td> <td>89 OSPF</td> </tr> <tr> <td>9 IGRP</td> <td>51 AH</td> <td>115 L2TP</td> </tr> </table>	1 ICMP	17 UDP	57 SKIP	2 IGMP	47 GRE	88 EIGRP	6 TCP	50 ESP	89 OSPF	9 IGRP	51 AH	115 L2TP	<p>Fragment Offset</p> <p>Fragment offset from start of IP datagram. Measured in 8 byte (2 words, 64 bits) increments. If IP datagram is fragmented, fragment size (Total Length) must be a multiple of 8 bytes.</p>	<p>IP Flags</p> <p>x D M</p> <p>x 0x80 reserved (evil bit) D 0x40 Do Not Fragment M 0x20 More Fragments follow</p>
1 ICMP	17 UDP	57 SKIP													
2 IGMP	47 GRE	88 EIGRP													
6 TCP	50 ESP	89 OSPF													
9 IGRP	51 AH	115 L2TP													
<p>Header Length</p> <p>Number of 32-bit words in TCP header, minimum value of 5. Multiply by 4 to get byte count.</p>	<p>Total Length</p> <p>Total length of IP datagram, or IP fragment if fragmented. Measured in Bytes.</p>	<p>Header Checksum</p> <p>Checksum of entire IP header</p>	<p>RFC 791</p> <p>Please refer to RFC 791 for the complete Internet Protocol (IP) Specification.</p>												



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 3 - NETWORK

- Layer 3 enables “routing” of data
 - Routing is how networks are connected together
- Layer 3 enables the creation of "logical" networks
 - Separate networks can share physical infrastructure

LAYER 3 - NETWORK

- Layer 3 Audio?
 - Dante
 - AES67
 - RTP





DANTE™ AV NETWORKING WORLD


www.audinate.com/avnw-amsterdam15 ©2015

LAYERS 1,2,3

- The level of detail in the OSI model is largely unnecessary for most
- These three layers are the most useful to the AV engineer
- There is very little practical choice or configuration available to the user above Layer 3

LAYER 4 - TRANSPORT

- The “TCP” in TCP/IP

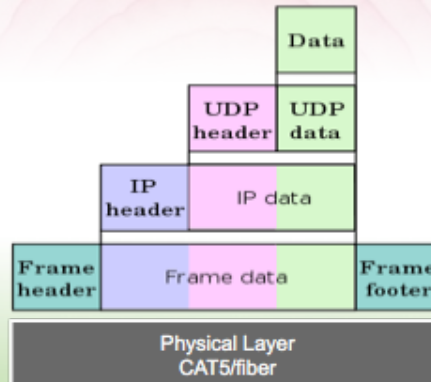



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

TCP

- Makes sure that data arrives
 - Re-transmits lost data
- Takes care of packet ordering
 - Presents data to the application in the order that it was transmitted, not necessarily the order it was received
- Flow control
 - Only transmit at a rate that the network can support



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

UDP

- Lightweight
- No re-transmitting lost packets by the protocol
- Good for streaming media



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 4 - TRANSPORT

- Layer 4 Audio?
 - All Layer 3 Audio is actually “full stack”
 - Layer 3, 4, 5, 6, and 7



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 5 - SESSION

- How we identify the start and end, defines a “conversation”



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

TCP

- TCP (yes it is both Layer 4 and Layer 5)



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

LAYER 6 - PRESENTATION

- The context with which data is presented
 - Encryption
 - SSL

LAYER 7 - APPLICATION

- What you are actually doing!
 - HTTP





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

NETWORKING CONCEPTS

- Multicast
- QoS





DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

MULTICAST

- Multicast v. Unicast
- IGMP

MULTICAST

- Unicast A diagram showing a single blue arrow pointing from a small circle on the left to a small circle on the right, representing a one-to-one communication.
 - Useful for point-to-point signals
- Multicast A diagram showing a single blue arrow pointing from a small circle on the left to a vertical line of three small circles on the right, representing a one-to-many communication.
 - Useful for one-to-many signals



DANTE™ AV NETWORKING WORLD


www.audinate.com/avnw-amsterdam15 ©2015

UNICAST

- Point-to-point efficiency
 - Channels are transmitted once for each receiver

UNICAST

- Packets stay on a narrow path between the sender and the receiver
- Packets only interfere with each other when paths cross
 - Make cross points gigabit!

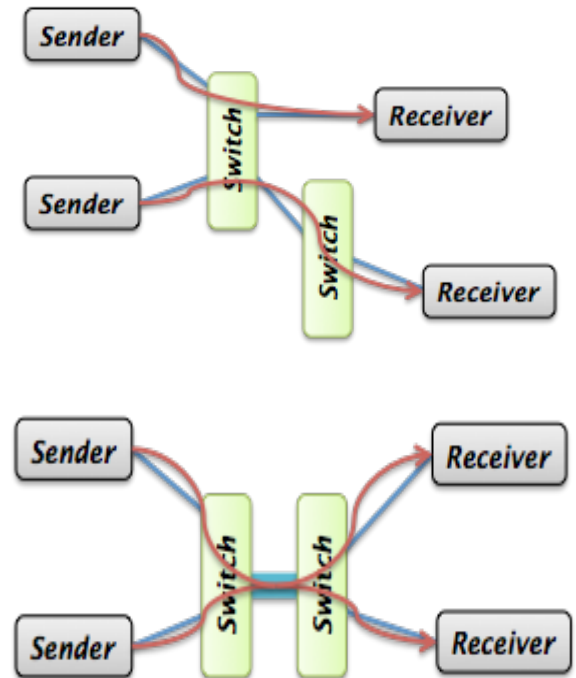



DANTE™ AV NETWORKING WORLD


www.audinate.com/avnw-amsterdam15 ©2015

MULTICAST

- One-to-many efficiency
 - Channels are transmitted once to all receivers

MULTICAST

- Packets flood throughout the network, duplicated by switches
- Assume that multicast channels will use up bandwidth on all network links
- Compare to multi-Unicast

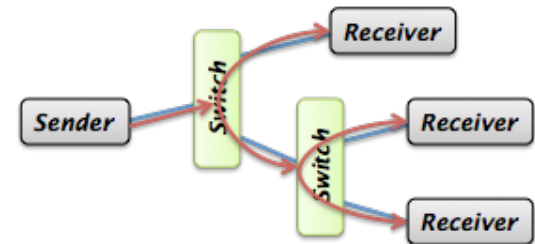



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IGMP

- Internet Group Management Protocol
 - Manages membership of multicast groups
 - Used between IP hosts and multicast router



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

IGMP SNOOPING

- Allows a layer 2 (Ethernet) switch to listen in on IGMP protocol messages
- Switch can then route multicast traffic instead of broadcasting it to every port



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

QOS

QUALITY OF SERVICE

- QoS is a large area with lots of jargon
 - Bottom line is to ensure that some application traffic gets preferred treatment from the network



DANTE™ AV NETWORKING WORLD


www.audinate.com/avnw-amsterdam15 ©2015

QOS

- Usually achieved by marking packets with a priority field
 - Just a number which reflects the relative importance of each packet
 - E.g. Diffserv Code Point (DSCP)

QOS

- Diffserv Code Point (DSCP)
- TCP/IP Priority
 - Diffserv

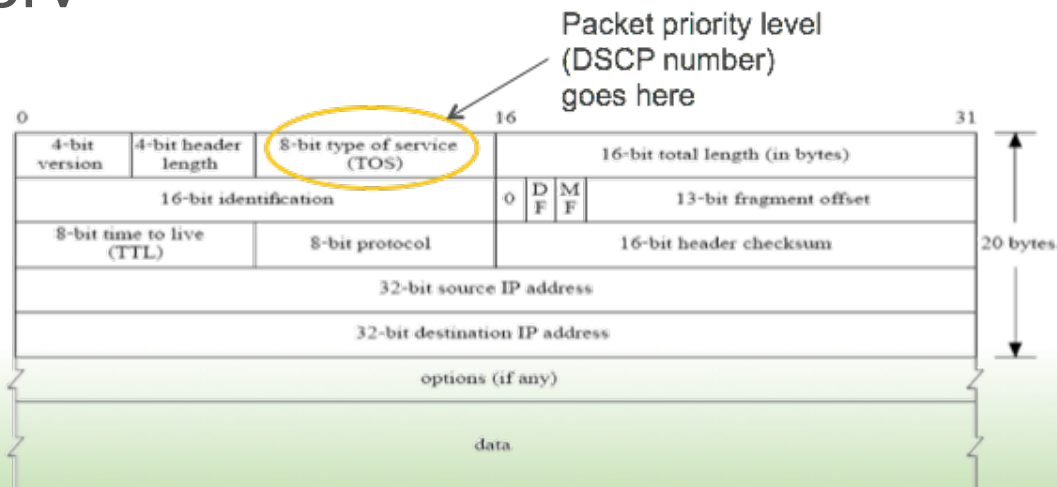



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

QOS

- Switches can look at the priority value and:
 - Prioritize some packets over others
 - Assign high priority to important traffic
 - E.g. voice packets in a VoIP system
 - The method used in VoIP today

QOS



- Packets can be prioritized and forwarded preferentially



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

QOS

- Strict Priority
 - Packets are drained from higher priority queues before lower priority queues



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Adding networked audio to expand or replace existing
 - Either a common use network or dedicated infrastructure
 - IT will own or manage the infrastructure
- Of course, it will be a Dante networked system



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Does Dante require any special network infrastructure?
 - No, special network infrastructure is not required.
 - Since Dante is based upon universally accepted networking standards, Dante-enabled devices can be connected using inexpensive off-the-shelf Ethernet switches and cabling



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Does Dante require a dedicated network infrastructure?
 - No, a dedicated network infrastructure is not required.
 - Dante-enabled devices can happily coexist with other equipment making use of the network, such as general purpose PCs sending and receiving email and other data



EXAMPLE

- Dante uses DHCP for addressing when available, and will auto-assign an IP address if it is not, exactly like a PC/Mac
 - Dante devices will continue to "look" for DHCP even after auto-assigning an IP address
- Some, but not all, Dante devices allow the setting of static IP addresses



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Dante uses mDNS and DNS-SD for discovery and enumeration of other Dante devices
 - Including Dante Controller and Dante Virtual Soundcard
 - Originally known as Apple's Bonjour, this is a low traffic, multicast protocol.



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Dante uses Precision Time Protocol (PTP) for time synchronization
 - Dante uses the IEEE1588-2002 version, which uses multicast UDP transport
 - This is generally a few small packets a few times a second



EXAMPLE

- Dante uses UDP for audio distribution, both unicast and multicast
 - By default they are sent using unicast addressing, but the user can change this to multicast using Dante Controller
 - Typical bandwidth is about 5Mbps for each audio flow, which can contain up to 8 audio channels, but 4 channels per flow is typical



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- When does it make sense to use multicast rather than unicast?
 - When a particular audio channel or group of audio channels is being sent to multiple receivers (typically three or more)
 - It is a more efficient use of available network bandwidth to send a single multicast packet to many receivers than to send individual packets with identical payloads to each receiver



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Dante implements IGMP to assist with multicast management
 - Support for IGMP is not required in a network
 - It is in Dante to make integration into mixed-use networks simpler



DANTE™ AV NETWORKING WORLD

www.audinate.com/avnw-amsterdam15 ©2015

EXAMPLE

- Dante uses standard Voice over IP (VoIP) Quality of Service (QoS) switch features to prioritize clock sync and audio traffic over other network traffic
- Any switch that supports Diffserv (DSCP) QoS with strict priority and 4 queues, and has Gigabit ports for inter-switch connections should be appropriate for use with Dante



EXAMPLE

- Dante will tag packets and its tags can be integrated into an existing IT network QoS scheme

Priority	Usage	DSCP Label	Hex	Decimal	Binary
High	Time critical PTP events	CS7	0x38	56	111000
Medium	Audio, PTP	EF	0x2E	46	101110
Low	(reserved)	CS1	0x08	8	001000
None	Other traffic	BestEffort	0x00	0	000000



DANTE™ AV NETWORKING WORLD

AMSTERDAM - 9 FEBRUARY 2015

Networking 101

Landon Gentry
Audinate
