


# Dante Ultimo™

Digital Media Networking Perfected

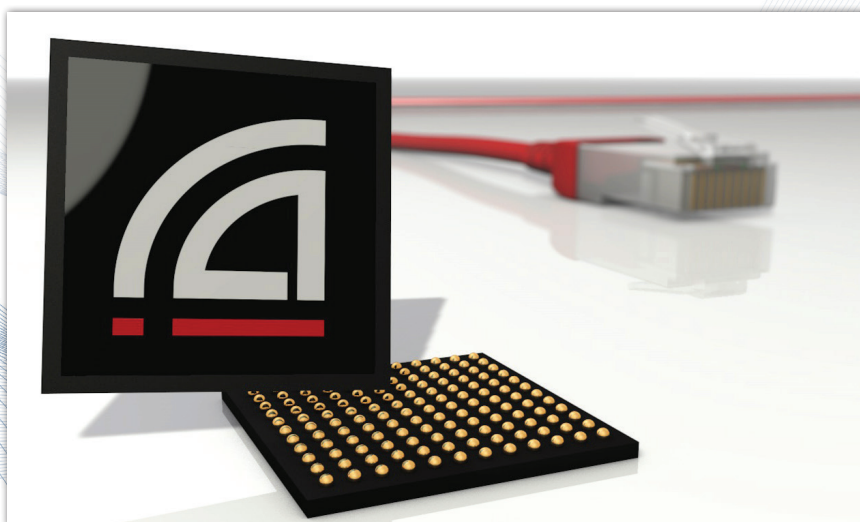

## Ultimo: Network Everything.

Audinate's patented Dante™ networking solution is the product of years of networking expertise, innovation, and technological creativity. Audinate knows what it takes to deliver great products, and has built that experience into the Ultimo™ family of products. Now you can build your products with the Dante advantage more quickly and cost-effectively than ever before, with the most highly-integrated Dante interface to date. The members of the Ultimo family are fully-featured chips providing a complete, ready-to-use Dante interface for networked audio products requiring low channel-count support. High integration minimizes component count, reduces costs, and enables space-constrained networked devices. Ultimo brings Dante networking to the widest range of products.

There are currently four members of the Ultimo family:

- ▶ **UXT-01-002** provides a Dante interface for networked audio products requiring up to 2x2 channels at 44.1 kHz, 48kHz, 88.2kHz and 96kHz sample rates
- ▶ **UXT-01-004** provides a Dante interface for networked audio products requiring up to 4x4 channels at a sample rates of 44.1 and 48kHz, and up to 2x2, 4x0 or 0x4 channels at sample rates of 88.2 and 96kHz
- ▶ **ULT-01-002** provides a Dante interface for networked audio products requiring up to 2x2 channels at 44.1 kHz, 48kHz, 88.2kHz and 96kHz sample rates
- ▶ **ULT-01-004** provides a Dante interface for networked audio products requiring up to 4x4 channels at a sample rates of 44.1 and 48kHz, and up to 2x2, 4x0 or 0x4 channels at sample rates of 88.2 and 96kHz

The UXT-01-002 chip is fully pin and feature backwards-compatible with the ULT-01-002, and the UXT-01-004 chip is fully pin and feature backwards-compatible with ULT-01-004.

UXT-01-002 and UXT-01-004 are recommended for new designs.

**Note:** ULT-01-002 and ULT-01-004 are only available to existing licensees for existing products.

### Easy to use

Get Dante's legendary flexibility and easy setup into your products, and set your customers' imaginations aflame. The Dante Ultimo family supports all the features that have driven widespread adoption of Dante technology: Auto-discovery of devices, label-based routing of signals, true plug-and-play operation, and of course superb audio performance over standard networks that can freely share all types of data. Dante Controller software provides simple point-and-click network setup between Ultimo devices and any other Dante-enabled products.

### Tiny chip, big toolbox

The Audinate Ultimo Family includes a complete toolkit that allows you to fully integrate Dante into your designs, with simple audio interfacing, and a rich set of control interfaces supporting even the most sophisticated networked audio products. Dante Ultimo may have a tiny footprint, but it offers a comprehensive set of tools, options and possibilities.

# Audinate

MEDIA NETWORKING SOLUTIONS

## FEATURES & BENEFITS

- ▶ **Cost-effective Dante interface:** 2in+2out or 4in+4out\*, 100Mbps Ethernet interface suitable for a wide range of audio I/O devices
- ▶ **Network to the edge:** Enable Dante networking across your entire product range
- ▶ **High performance media networking:** Low latency, tightly synchronized transport of uncompressed audio over IP networks
- ▶ **High-quality clocks:** Low jitter audio clock synthesis with sample-accurate time alignment between networked devices
- ▶ **Highly interoperable:** Dante is the most interoperable, easy-to-use network solution. Exchange networked audio with hundreds of Dante-enabled AV products, including Dante Virtual Soundcard
- ▶ **Deployable on most network switches:** Dante runs easily on existing network switch infrastructure
- ▶ **Easy to use:** Incorporates award-winning Dante features such as automatic device discovery, plug-and-play networking, user-editable device names and channel labels, and more
- ▶ **Simple audio interfacing:** I<sup>2</sup>S interface allows direct connection to a wide variety of ADC, DAC, DSP and amplifier chips
- ▶ **Rich set of control interfaces:** Choice of SPI, UART, and GPIO interfaces enable sophisticated products with networked control
- ▶ **Firmware updatable:** Software updates with new features and fixes can be loaded via the network
- ▶ **Powerful development tools:** PC and Mac software development environments for custom signal routing and control applications
- ▶ **Dante Device Protocol:** Enables routing, event and control management via the Host CPU interface
- ▶ **Device monitoring:** Signal presence, latency statistics and clock stability statistics exposed to Dante Controller and/or other applications for real-time device status monitoring
- ▶ **Device Lock:** Lock and unlock Ultimo devices remotely using Dante Controller

\* ULT-01-004 & UXT-01-004 only

# Dante™

Serial audio interfacing with I<sup>2</sup>S allows direct connection to a wide variety of audio components (e.g. powered speakers, microphones, ADC, DAC, DSP, Class-D amps, etc). In combination with the recommended clock synthesis circuitry, an Ultimo design can meet the most stringent requirements for audio quality, and can operate as a master clock for a network of Dante devices. The built-in RMII Ethernet interface supports the most cost-effective Ethernet PHY solutions available today, and Power Over Ethernet (POE) designs.

In addition to audio and network interfaces, Ultimo offers a variety of control ports supporting packet bridging control between the network and internal components, via the Dante Control and Monitoring channel, or independently via UDP. Streams of control data (e.g. serial) and control messages can be passed between the network and internal host processors, or DSP chips supporting custom network control protocols. Supported ports include SPI master, SPI slave, or UARTs, and GPIO.

## Dante Ultimo Interfaces


The diagram to the right shows network, audio and control interfaces supported by the Ultimo chip family.

A separate clock synthesis component is used to generate high quality, low jitter audio clocks.

## Supported Channel Configurations

Tx \ Rx	0	1	2	3	4
0	-	0x1	0x2	0x3	0x4
1	1x0	1x1	1x2	1x3	1x4
2	2x0	2x1	2x2	2x3	2x4
3	3x0	3x1	3x2	3x3	3x4
4	4x0	4x1	4x2	4x3	4x4

Green: All chips @ all sample rates  
 Blue: ULT-01-004 & UXT-01-004 @ all sample rates  
 Red: ULT-01-004 & UXT-01-004 only @ 44.1 / 48 kHz  
 Channel configuration is specified via capability file.

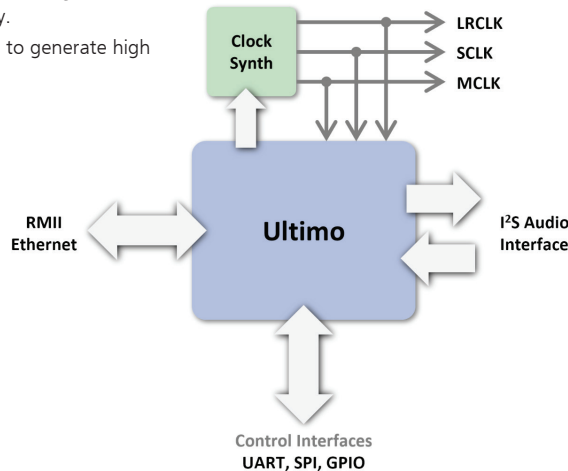

## SPECIFICATIONS

### Hardware

144 pin MAPBGA package (13 mm x 13 mm)

3.3VDC @ 0.7W Max

High quality, low jitter clock generation via external Silabs chip

### Network Interface

Standard 100Mbps Ethernet

RMII Ethernet interface with MDIO

Hardware time-stamping, supporting sample-accurate playback

Transmit flows: 2 (unicast or multicast)

Receive flows: 2 (unicast or multicast)

Latency from 1ms

### Audio Interface

2x2 or 4x4\* audio channels

I<sup>2</sup>S digital audio format

16, 24 or 32-bit audio samples (per device or per channel)

44.1 kHz, 48kHz, 88.2kHz\*\* and 96kHz\*\* sample rates

Sample rate pull-up/down (+4.1667, +0.1, -0.1, and -4.0 %)

Provides LRCLK, SCLK, MCLK (256x FS)

### Control Interfaces

2x UARTs: A and B, console on UART-A

SPI Master with independent select lines

SPI Slave

8x GPIO pins for user controls and/or watchdog signal

4x bi-color LED control pins for 'System', 'Sync', 'Control' and 'Error' indicators

\* ULT-01-004 & UXT-01-004 only  
 \*\* 2x2, 0x4 or 4x0 channels only

**Note:** All information within this document is subject to change without notice.

## APPLICATIONS

- ▶ Amplifiers
- ▶ Powered speakers
- ▶ Headphones
- ▶ Microphones
- ▶ Conference microphones
- ▶ Paging stations
- ▶ Personal monitoring systems
- ▶ AV wall plates
- ▶ Recording interfaces
- ▶ Analogue / digital break-in / break-out boxes

## WORLD WIDE OFFICES

### Audinate Pty Ltd

Level 1, 458 Wattle St  
 Ultimo NSW 2007  
 AUSTRALIA  
 Tel: +61 2 8090 1000

### Audinate Inc

1732 NW Quimby Street  
 Suite 215  
 Portland, OR 97209  
 USA  
 Tel: +1 503 224 2998

info@audinate.com  
 www.audinate.com

Audinate, Dante, and their logotypes are trademarks of Audinate Pty Ltd.

All other trademarks remain the property of their respective owners.

Audinate Products are protected by one or more of US Patents 7747725, 8005939, 7978696, 8171152 and other patents pending or issued, see www.audinate.com/patents.  
 © 2016 Audinate Ltd. All rights reserved.